

INSTRUCTIONS TO SWAP OVER BASECAP TO NEW MODEL

1. Remove screws in order shown below




2. Slowly pull out the base cap from the base section without pulling on the solar panel cable to hard.



3. Disconnect the solar panel cable



4. Swap over with new base cap that also comes with a seal now

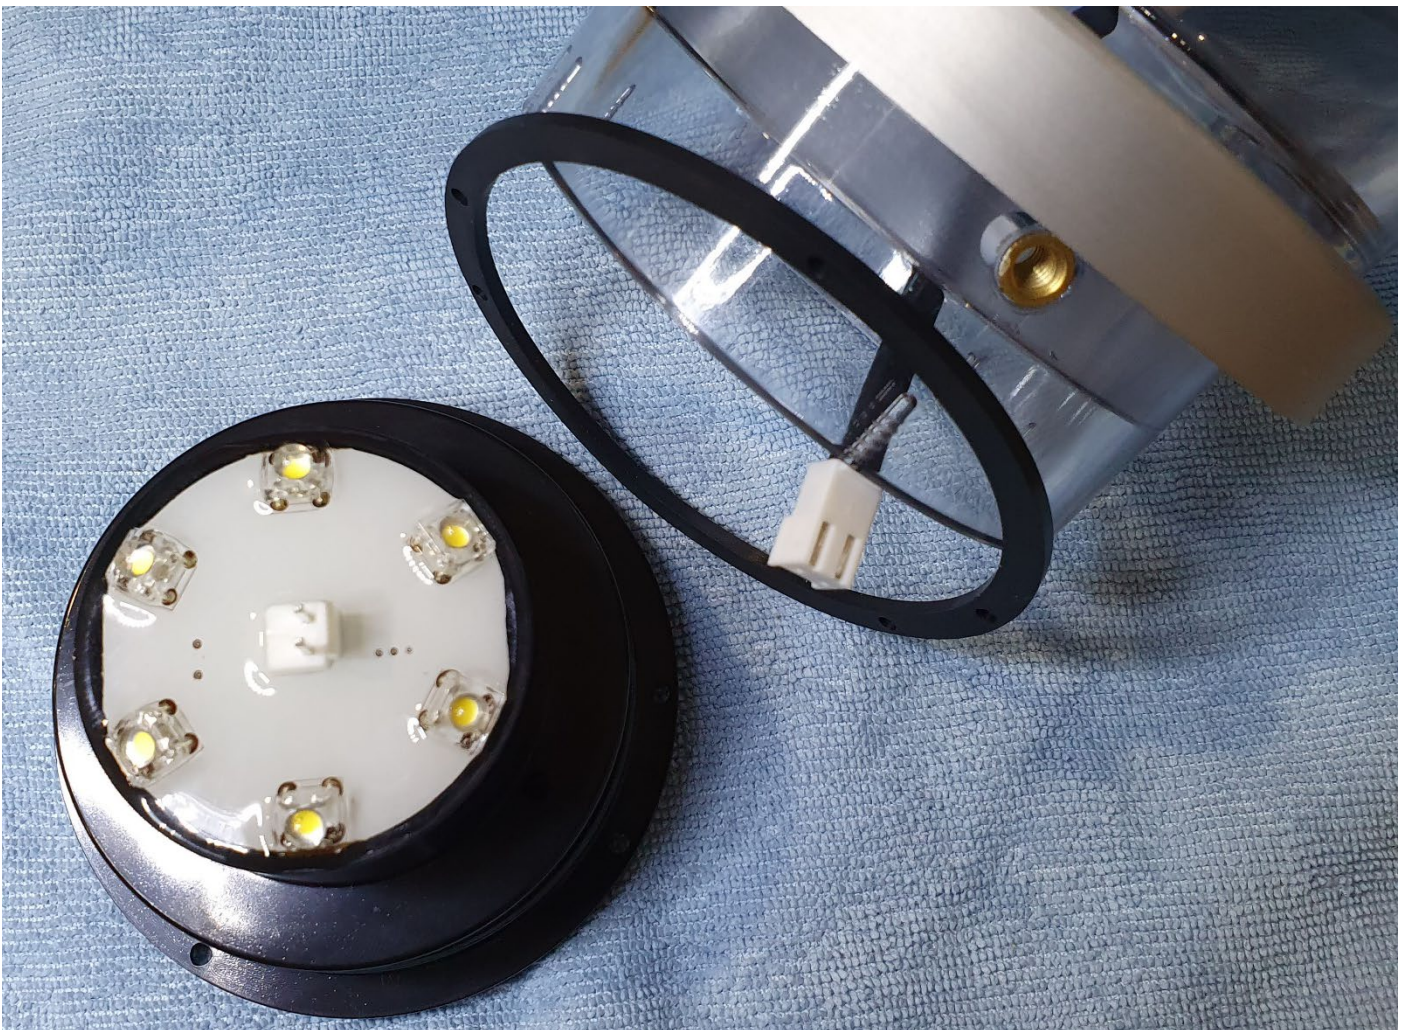


5. Reconnect the solar panel cable making sure the connector is locked on firmly.



6. Re-insert the new base cap and feed the cable internally up into the white cone shaped reflector so the cable is completely hidden.
7. As per Step 1 to remove the screws please repeat in the reverse order and line up the holes with the new base cap and seal and re-insert the 3 new screws supplied that hold the base cap in.



8. Add new battery with feet sitting within the moulded feet stays and re-insert the 2 screws that hold this on.

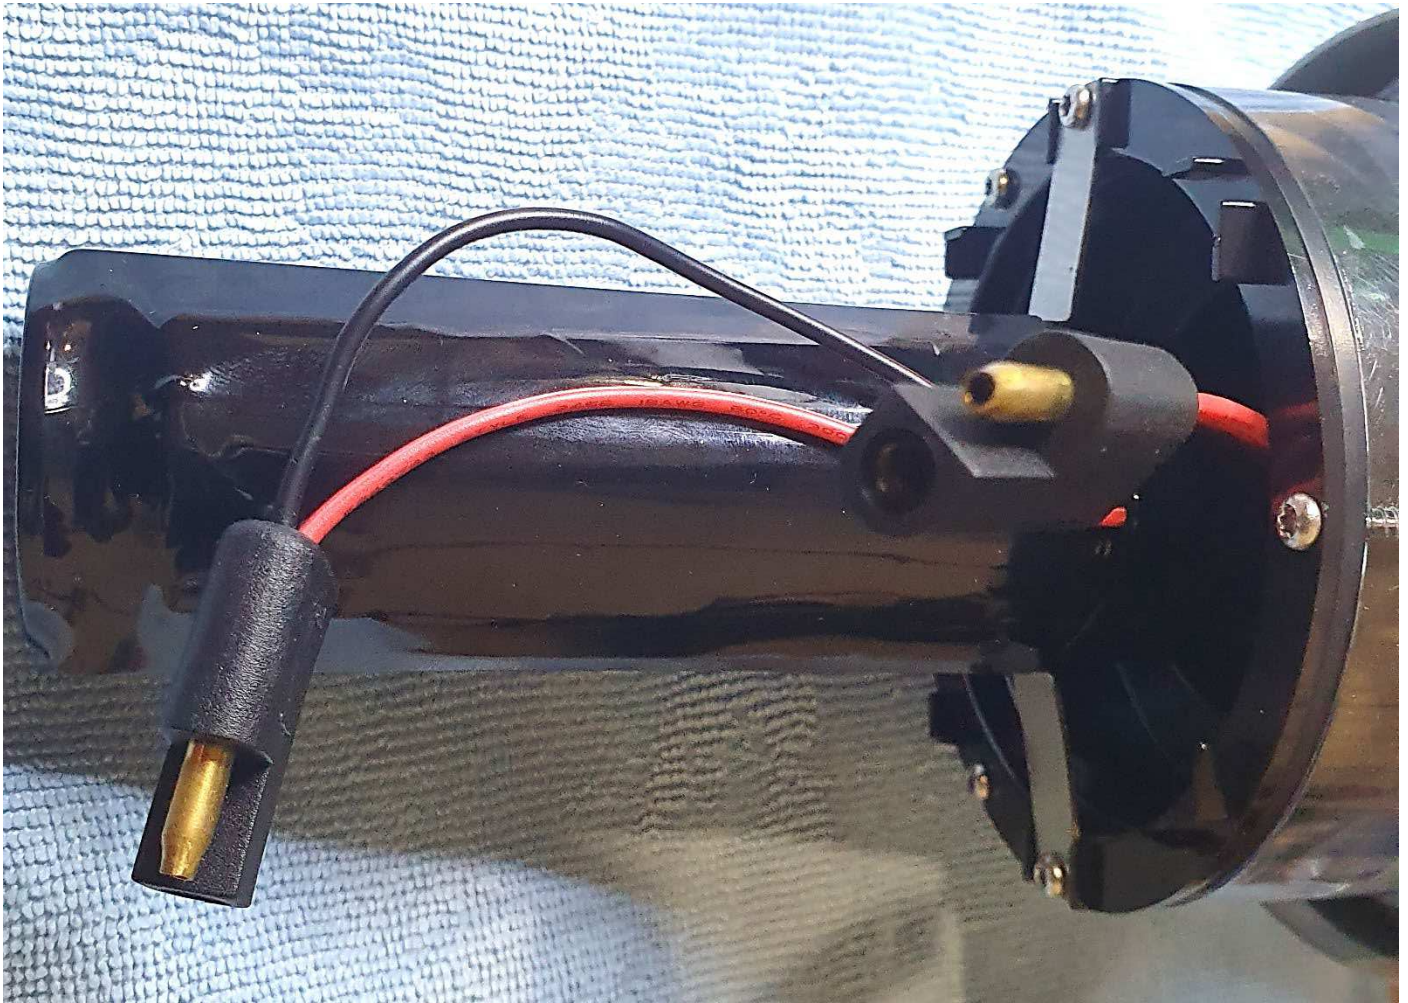

9. Connect the new weatherproof battery connectors together exactly as shown below to activate power to the unit.

